

# L 202 - G 202



*Glaze in louvre with V-blade*

# L 202 - G 202



## Product description

- Extruded sections of aluminium AlMgSi 0,5
- Pitch : 20 mm
- Standard finishes :
  - Silver anodised (15-20 micron)
  - RAL 9010 (60-80 micron) (for UK : hipca white)
- On request : any RAL colour
- Suitable for 20, 24 and 28 mm glazing (20, 24 and 28 mm equal leg outerframe)
- Track : 17 mm
- Standard stainless steel 18/8 flyscreen : 2 x 2 mm.  
On request : stainless steel 18/8 flyscreen : 6 x 6 mm
- Physical free area : 43 %
- On request : with controllable vents G 202  
Operated with turning plastic knob  
(Optional : operated with a cord)


## Sizes:

- All sizes are possible
- When ordering :  
Please quote overall width x height

## Fixing


- To be glazed in the window frame
- The use of glazing blocks is recommended

## Selection diagram

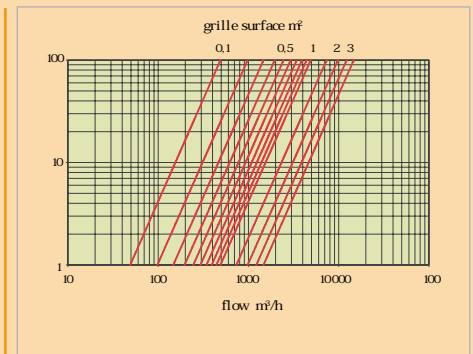

Pressure difference in Pa


## Pressure drop - wind speed

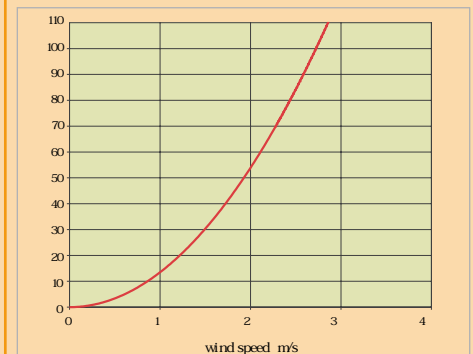


Pressure difference in Pa

Aralco NVS  
Textielstraat 18a  
8790 Waregem (B)  
T + 32 56 52 80 60  
F + 32 56 52 80 65  
e-mail: info@aralco.be  
web: www.aralco.be

L 202

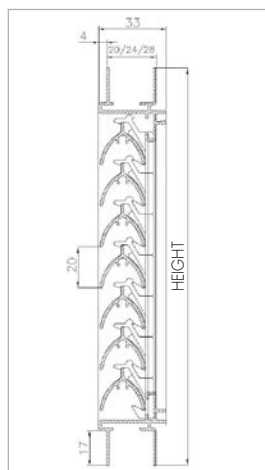

G 202

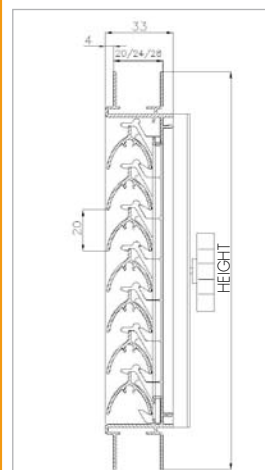

202 - Built-in

